



FASSI GROUP



ZEBRA 16 STAB

Articulated Boom Lift
With Stabilisers

Built to last

MAIN FEATURES

Working height	16,80 m / 55,11 ft
Maximum horizontal outreach	9,40 m / 30,84 ft
Longitudinal leveling	8° / 14%
Transverse leveling	11° / 19%
Automatic stabiliser leveling	



▲ STANDARD EQUIPMENT

- 4 wheel drive
- Oscillating axle
- Non-continuous 360° turret rotation
- 180° platform rotation
- Jib tilt angle 133°
- 230kg load capacity
- 45% gradeability
- 5° Tilt
- 1° tilt on stabilisers
- Drive at full height
- Overload sensor
- Hour meter
- Alarm
- On-board diagnostic colour LCD console
- Driver protection system
- Swing out engine tray
- Wide opening covers

★ ACCESSORIES & OPTIONS

- Anti-crushing system (ACS)
- Generator
- Power supply in the platform
- Compressed air plug in platform
- Flashing beacon
- Extreme cold kit
- Motion alarm
- Movement cut off at 5° tilt
- Platform working lights
- Oil (HV 32 /bio/ food-grade)
- Non-marking tyres
- Stabilising plate holder
- Customer colours paint

ZEBRA 16 STAB

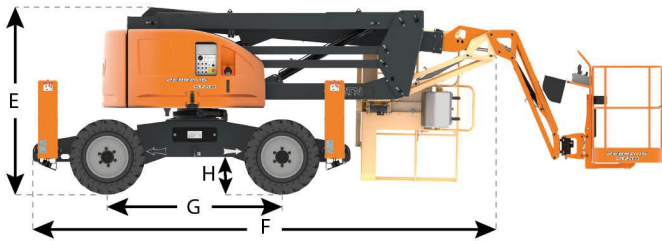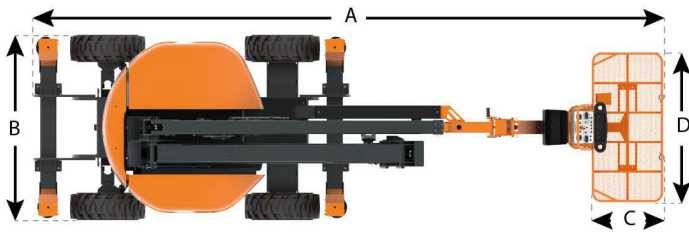

This product complies with European regulations in force. Due to our constant improvement policy, ATN reserves the right to many any modifications without any prior notice.

Working height	16,80 m / 55,11 ft
Floor height	14,80 m / 48,55 ft
Maximum horizontal outreach	9,40 m / 30,84 ft
Knuckle height	7,80 m / 25,59 ft
Load capacity	230 kg / 507 lbs

A	Length	7,70 m / 25,26 ft
B	Width	2,19 m / 7,18 ft
C	Platform length	0,86 m / 2,82 ft
D	Platform width	1,80 m / 5,90 ft
E	Height	2,25 m / 7,38 ft
F	Length (transport position)	5,69 m / 18,66 ft
G	Wheelbase	2,10 m / 6,88 ft
H	Ground clearance (machine centre)	0,40 m / 1,31 ft

Turret rotation	360° NC
Platform rotation	180°
Tail swing	0
Jib tilt angle	133°
Drive speed (stowed)	6 km/h / 3,72 mph
Drive speed (raised)	0,9 km/h / 0,56 mph
Gradeability (stowed)	45%
Max. tilt	5°
max. slope possible on stabilisers	1°
Inside turning radius	1,72 m / 5,64 ft
Outside turning radius	4,55 m / 14,92 ft
Total weight	8050kg/ 17747lbs
Ground pressure on stabilisers	670 kN/m ²
Ground pressure on wheels	1422 kN/m ²

Wheel size	33x12-20
Diesel engine	26,1 KW
Fuel tank capacity	60 L
Hydraulic tank capacity	85 L

Ri : Inside turning radius
Re : Outside turning radius

